




TORO-IRRIGATION DIVISION  
5825 JASMINE STREET  
RIVERSIDE, CA 92504  
TOLL FREE: 1-877-345-8676  
FAX: (951) 359-1870  
crc@toro.com  
www.toro.com

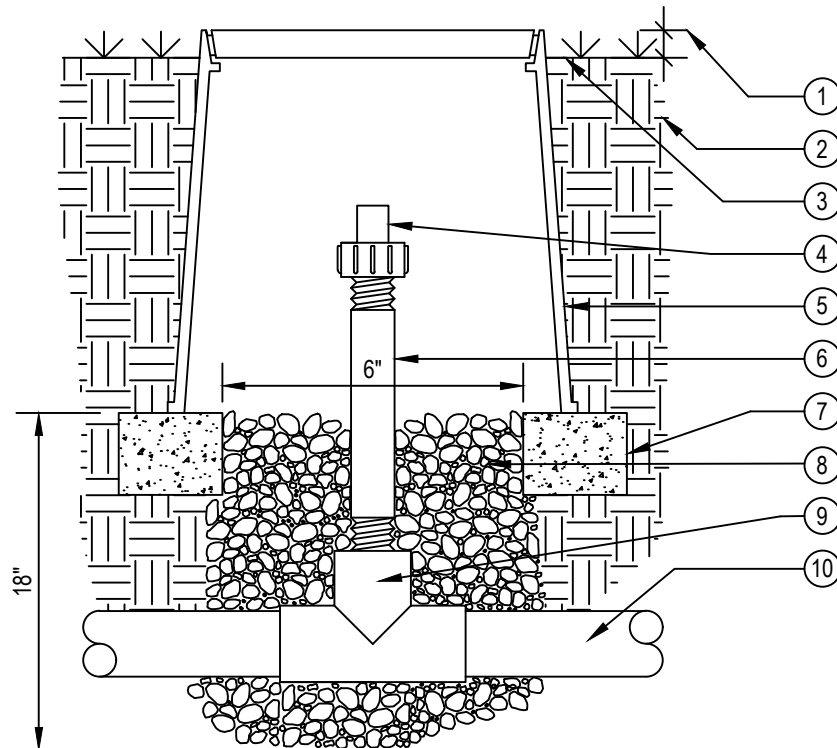


SECTION/ELEVATION  
NOT TO SCALE

LEGEND:

- ① 1" ABOVE FINISH GRADE.
- ② NATIVE SOIL PER SPECIFICATIONS.
- ③ FINISH GRADE.
- ④ TORO FLUSH VALVE (T-FCH-H-FIPT).
- ⑤ 6" ROUND PLASTIC VALVE BOX. HEAT BRAND "FV" ON LID IN 1" HIGH CHARACTERS.
- ⑥ 3/4" SCH 80 PVC NIPPLE (LENGTH AS REQUIRED).
- ⑦ BRICK SUPPORTS (2 COMMON BRICKS REQUIRED).
- ⑧ PEA GRAVEL SUMP (6" x 18").
- ⑨ PVC TEE (SxSxT) WITH 3/4" THREADED OUTLET.
- ⑩ PVC PIPING.

NOTES:

1. USE ONE FLUSH VALVE FOR EVERY 7 GPM PER ZONE. LOCATE AT LOW POINTS. FLUSH RATE IS 0.8 GPM. FLUSH PRESSURE IS 2 PSI. REFER TO TORO PUBLICATION #ALT111 FOR SPECIFICATIONS.
2. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
3. DO NOT SCALE DRAWING.
4. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
5. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



**DRIP IN<sup>®</sup> 17MM DRIPLINE**

FLUSH VALVE ON PVC-TEE